
SMART FEATURES	
Wi-Fi Enabled	Yes
ThinQ® Technology	Yes
ThinQ Care	Yes
SmartDiagnosis™	Yes
Remote Monitoring	Yes
MATERIALS AND FINISHES	
Hidden Hinges	Yes
Surface	Smooth
Fingerprint & Smudge Resistant Exterior	Yes
Handles	Pocket
ACCESSORIES	
Replacement Water Filter	LT1000P
Replacement Fresh Air Filter	LT120F
TECHNICAL SPECS	
Required Power Supply	115 V, 60 Hz, 15 Amp
Plug Type	3-Prong
Power Cord Location	Back
Min. / Max. Water Pressure	20 - 120 psi
DIMENSIONS / CLEARANCES / WEIGHTS	
Depth with Handles	27 1/2"
Depth without Handles	27 1/2"
Depth without Door	24 3/4"
Depth (Total with Door Open)	43 7/8"
Height to Top of Case	68 7/8"
Height to Top of Door Hinge	70 1/4"
Width	35 3/4"
Width (Door Open 90˚ with Handle)	36 1/16"
Width (Door Open 90˚ without Handle)	36 1/16"
Width (Door Fully Open without Handle)	45 1/2"
Door Edge Clearance with Handle	5/32"
Door Edge Clearance without Handle	5/32"
Installation Clearance	Sides 5/32", Top 1", Back 2"
Approx. Weight (Product / Carton)	235 lbs. / 255 lbs.
Carton Dimensions (WxHxD)	38" x 73" x 30"
LIMITED WARRANTY	
Parts & Labor	1 Year
Sealed System (Parts & Labor)	5 Years
Compressor (Parts & Labor)	5 Years
Smart Inverter Compressor (Parts Only)	6 - 10 Years

*System tested and certified by NSF® International against NSF / ANSI Standard 42, Standard 53 and Standard 401.

DIMENSIONS / CLEARANCES

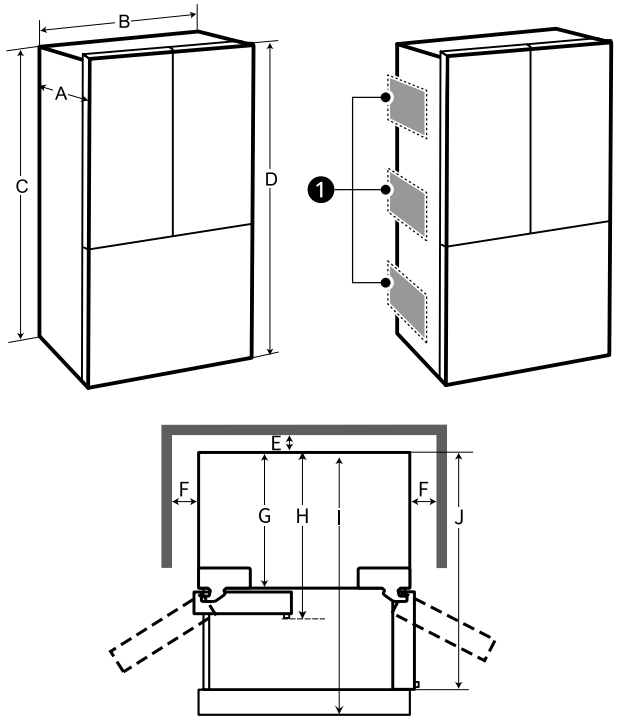

DIMENSIONS / CLEARANCES		
A	Depth without Handle	27 1/2" (699 mm)
B	Width	35 3/4" (908 mm)
C	Height to Top of Case	68 7/8" (1750 mm)
D	Height to Top of Hinge	70 1/4" (1785 mm)
E	Back Clearance	2" (50 mm)
F	Depth without Door	24 3/4" (628 mm)
G	Depth with Handle	27 1/2" (699 mm)
H	Depth (Total with Freezer Drawer Open)	46" (1168 mm)
I	Depth (Total with Door Open 90°)	43 7/8" (1114 mm)

INSTALLATION NOTES

- The installation location chosen for the refrigerator should allow space behind the unit for connections and airflow and space in front to open the doors and drawers.
- Too small of a distance from adjacent items may result in lowered freezing capability and increased electricity consumption charges. Allow at least 24 inches (610 mm) in front of the refrigerator to open the doors, and at least 2 inches (50.8 mm) between the back of the refrigerator and the wall.
- The space between the product and the side wall must be at least 5/32 in. (4 mm) on both sides. When installing in a narrow space, attach the enclosed spacers on each side ❶ of the refrigerator as shown to ensure a minimum clearance of 5/32 in. (4 mm).

LG Business Solutions

© 2025 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require Internet access. Content and services may vary by product and are subject to change without notice.