
Installation

Clearance

See the following figures and tables for space requirements for installation.


Bar handle type

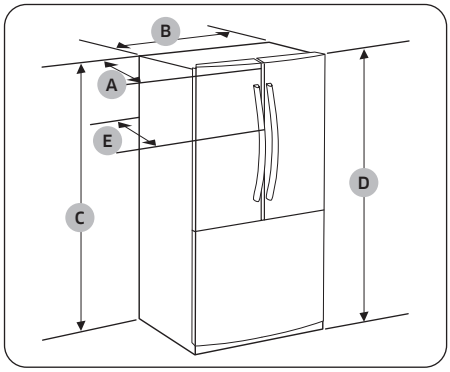


Model	RF70H30* RF80H30*	RF70H25* RF80H25*
Depth “A”	31 15/16" (811 mm)	27 1/2" (698 mm)
Width “B”	35 7/8" (912 mm)	35 7/8" (912 mm)
Height “C”	68 7/8" (1749 mm)	68 7/8" (1749 mm)
Height "D" (Maximum)	70 1/4" (1783 mm)	70 1/4" (1783 mm)
Depth with handle “E”	34" (863 mm)	29 4/8" (750 mm)
Depth with dispenser “F” *	31 7/8" (811 mm)	27 4/8" (698 mm)


* Only applies to models with a dispenser which is an optional feature.

Recessed handle type

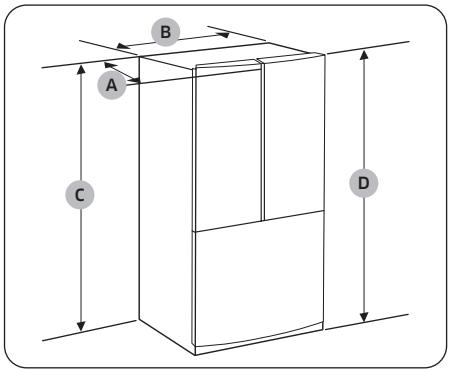

Dispenser type (Optional)

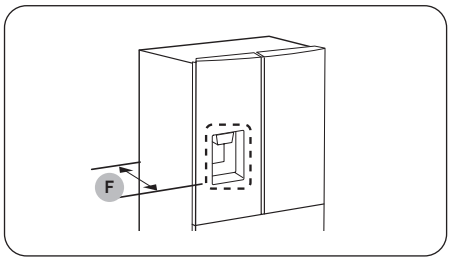

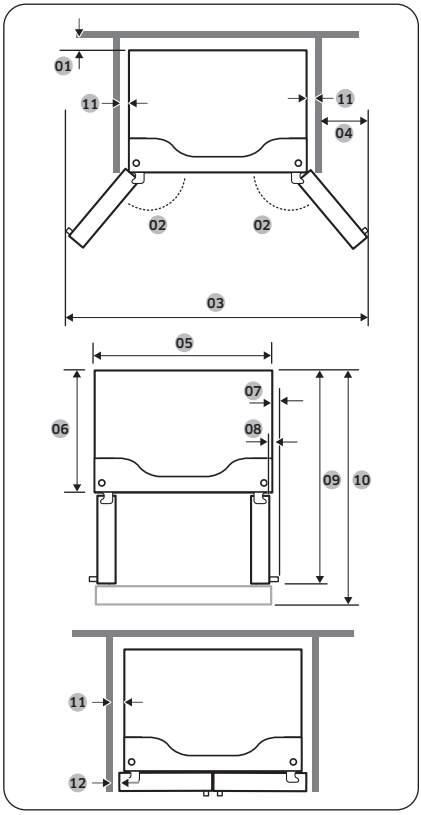


Model	RF70H30* RF80H30*	RF70H25* RF80H25*
01	more than 2" (50 mm) recommended	
02	108°	108°
03	48 5/8" (1234 mm)	48 5/8" (1234 mm)
04	6 3/8" (163 mm)	6 3/8" (163 mm)
05	35 7/8" (912 mm)	35 7/8" (912 mm)
06	29 4/8" (748 mm)	25" (635 mm)
07	1 3/4" (44 mm)	1 3/4" (44 mm)
08	1/4" (7 mm)	1/4" (7 mm)
09	48 1/4" (1226 mm)	43 7/8" (1113 mm)
10	52 1/2" (1335 mm)	44 7/8" (1140 mm)
11	1/4" (6 mm)	1/4" (6 mm)
12	1/8" (4 mm)	1/8" (4 mm)

NOTE

The measurements in the table above may differ slightly from the actual measurements, depending on the measuring and rounding method.

Installation

Recommended cabinet dimensions

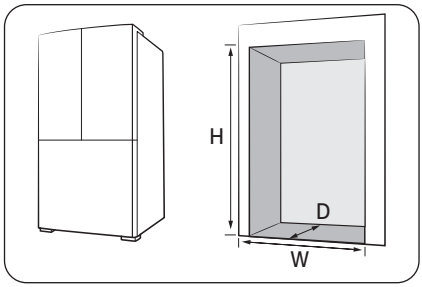

Model	Product dimensions	
	RF70H30*	RF70H25*
Depth "D"	31 15/16" (811 mm)	27 1/2" (698 mm)
Width "W"	35 7/8" (912 mm)	35 7/8" (912 mm)
Height "H"	70 1/4" (1783 mm)	70 1/4" (1783 mm)

Model	Recommended cabinet dimensions	
	RF70H30*	RF70H25*
Depth "D"	≥ 33 7/8" (860 mm)	≥ 29 1/2" (748 mm)
Width "W"	≥ 36 1/4" (920 mm)	≥ 36 1/4" (920 mm)
Height "H"	≥ 71" (1803 mm)	≥ 71" (1803 mm)

NOTE

To install the refrigerator inside a cabinet, ensure that the cabinet dimensions meet the minimum requirements. A minimum gap of 4 mm must be maintained between the refrigerator and the side walls.